



# Silver Saver

**BURNISHING  
SYSTEM**

**MODEL NO. BB1224**


**FOR YOUR LARGER TABLEWARE**

## **A BLAKESLEE EXCLUSIVE**

SPECIAL PORCELAIN-CERAMIC BURNISHING MEDIA AND CHEMICAL COMPOUND NOW MAKES IT POSSIBLE TO RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL FLATWARE AND HOLLOW WARE AS WELL AS SILVER.

### **FEATURES . . .**

**FROM THIS . . .**



**TO THIS . . .**

- Open-top design for easy loading and unloading
- Porcelain-Ceramic Media 1/3 the weight of steel balls
- Light weight permits burnishing of hollow ware
- No peening effect on stainless or silver
- Produces high luster
- Quiet operation
- No external plumbing
- Stationary
- 115-volt, 60-cycle current grounded cord and plug approx. 9' long
- Porcelain-Ceramic balls cannot rust



**In minutes . . . Tableware, both Stainless and Silver Plate are spotless. Also burnishes Aluminum Ware and Pewter . . . Other sizes available.**

### **PHYSICAL CHARACTERISTICS**

The frame is full-welded 1-1/2" 38mm x 1-1/2" 38mm CRS tubing, epoxy primed and painted. Skirt and covers are stainless steel. Tub is full-welded 1 1/2 ga. 3 mm CRS, epoxy primed and painted, lined with 3/8" 10mm cast polyurethane lining with molded urethane drain. The motor is 1-1/2 HP, 3450 rpm, 115 volts, single phase, 20.0 ampere, class A, constant-duty 104°F 40°C with a 3-1/2" 89 mm x 1/2" 13 mm drive pulley. The recirculating pump is P:AAA. Tank is two-gallon 7.6 liter capacity stainless steel. Eccentric shaft is 1" 25 mm diameter with double spherical roller bearings and a 2-3/4" 70 mm x 3/4" 19 mm drive pulley. The Silver Saver unit operates at a sound level of less than 85 dba. This unit is stationary and totally enclosed in stainless steel paneling with 2 access doors.

### **BURNISHING MEDIA**

Pure porcelain ceramic media will not rust and its weight is one-third that of steel balls. This lighter weight eliminates peening and allows burnishing of hollow ware. The ceramic media lasts the life of the machine with an approximate loss of 5% per year.

- **THE BLAKESLEE SILVER SAVER™ IS THE ONLY BURNISHING UNIT THAT WILL RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL TABLEWARE AS WELL AS SILVER PLATE.**

## BURNISHING COMPOUND

The burnishing compound used in the Blakeslee Silver Saver provides fast and safe burnishing of stainless steel, silver and brass. Detarnish soaking in separate pans is not necessary with the Blakeslee Silver Saver.

Burnishing compound available in case lots containing  
4-1 Gallon 3.8 Liter Bottles

## OPERATING TECHNIQUE

After the compound tank is filled with the proper amount of water and burnishing compound, the Blakeslee Silver Saver is ready for a day's operation without further attention. Flatware should be "dishwashing clean" before placing in Silver Saver. Rewash flatware after burnishing. Pump operates for two (2) minutes to allow proper quantity of burnishing compound into tub. Pump is activated by the on/off toggle switch.


## OPERATING TIME AND CAPACITY

The Blakeslee Silver Saver detarnishes and burnishes three gross of mixed flatware in a single operation and restores luster and brightness in less than 10 minutes. Reduces operating costs and provides the best possible flatware maintenance program. Items up to 23" 584 mm in length.

## SHIPPING DATA

SHIPMENT ..... 1 Carton (Total 580 Lbs. 263 kg.)  
MACHINE ..... 265 Lbs. 120 kg.  
MEDIA ..... 160 Lbs. 72 kg.  
COMPOUND  
2/1-Pint 0.48 Liters Bottles  
CARTON SIZE:  
52½" 1334 mm H, 31" 787 mm W, 43" 1092 mm L.  
CUBE: 40 ft. 1.147 m<sup>3</sup>.

Specifications subject to change without notice.

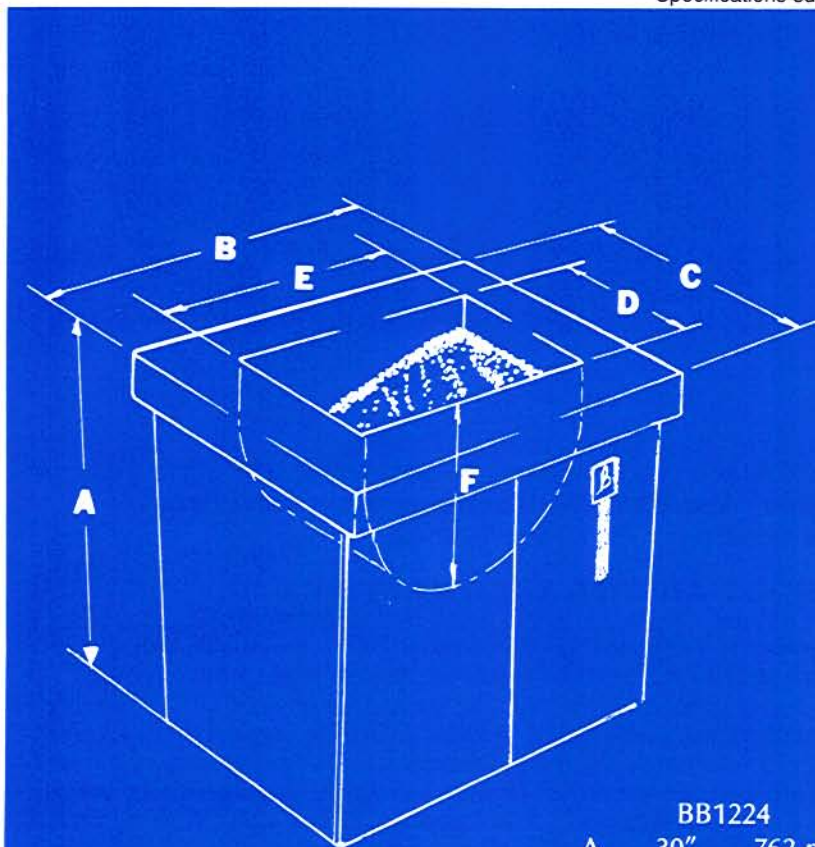

BB1224		
A	30"	762 mm
B	37"	940 mm
C	25"	635 mm
D	12"	305 mm
E	24"	610 mm
F	19"	483 mm

### SPECIFICATIONS:

FRAME:	1½" 38 mm × 1½" 38 mm CRS Tubing, Full-Welded; epoxy primed and painted
FEET:	(4) Adjustable
SKIRT AND COVERS:	Stainless Steel 2 access doors.
TUB:	3/8" 10 mm Cast Polyurethane lining with molded urethane drain; 11 ga. 3 mm CRS — all seams full-welded; epoxy paint
MOTOR:	1½HP 115 volt single phase 20.0 AMP Class A Constant Duty 104°F. 40°C 3450 RPM Drive Pulley 3½" 89 mm × ½" 13 mm.
COMPOUND TANK:	Stainless-Steel — 2 gallon 7.6 liter.
COMPOUND PUMP:	P:AAA
BEARINGS & ECCENTRIC SHAFT:	Shaft 1" 25 mm dia.; Bearings double spherical roller. Drive Pulley 2¾" 70 mm × ¾" 19 mm
SOUND LEVEL:	Silver Saver Burnishing System operates at less than 85 dba
WARRANTY:	1 Year; Defective Material and Workmanship; 3-Year Tub Lining



## BLAKESLEE

1844 South Laramie Avenue  
Chicago, IL 60804  
Phone: (708) 656-0660  
FAX: (708) 656-0017

## BLAKESLEE

66 Crockford Boulevard  
Scarborough, Ontario, Canada M1R 3C3  
Phone: (416) 751-2625  
FAX: (416) 751-8539

Printed in U.S.A.  
1-98-10M TR